


## SOUTH PACIFIC VACUUMS LTD COMMERCIAL AND INDUSTRIAL CLEANING EQUIPMENT

## VACUUM RECOVERY MADE EASY SR-1000 | SR-750 | SR-400



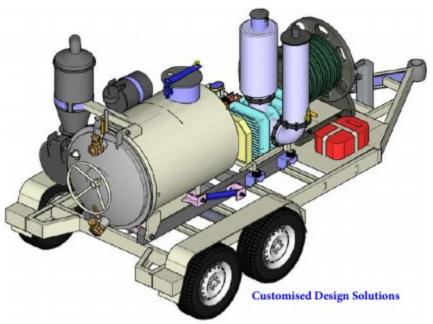

	SR-1000	SR-750	SR-400
Empty Weight	650 kg (Tank only)	600 kg (Tank only)	500 kg (Tank only)
Overall Dimensions (LxWxH)	1750 x 1450 x 1740 mm	1650 x 1450 x 1740 mm	1600 x 1350 x 1550 mm
Tank Capacity	1000L	750L	400L
Filtration	3 stage filtration with cyclone separator	3 stage filtration with cyclone separator	3 stage filtration with cyclone separator
Tank tilt type	Twin hydraulic cylinders	Twin hydraulic cylinders	Fixed frame at angle
Door opening type	Hydraulic	Hydraulic	Manual operated
	3-Stage cyclonic filtration	3-Stage cyclonic filtration	3-Stage cyclonic filtration
	Vacuum filter - Inline safety filter housing - 4"	Vacuum filter - Inline safety filter housing - 4"	Vacuum filter - Inline safety filter housing - 3"/ 4"
	Primary high level shutoff - 4"	Primary high level shutoff - 4"	Primary high level shutoff - 3"/ 4"
	Secondary shutoff with cyclone - 4"	Secondary shutoff with cyclone - 4"	Secondary shutoff with cyclone - 3"/ 4"
	Knock out box / Grit Rider	Knock out box / Grit Rider	Knock out box / Grit Rider
	EnduroVac package		Enduro Ute-Vac package
Power pack	V-twin Kohler/Honda Petrol Engine or Kohler Diesel Option		V-twin Kohler/Honda Petrol Engine
Vacuum System	Positive Displacement Tri Lobe Blower operating		Positive Displacement Tri Lobe Blower
Gauges	Vacuum pressure and fuel level		Vacuum pressure and fuel level
Fuel Tank Capacity	25L Petrol / 45L Diesel		25L Petrol
Silencers	Inlet and outlet Silencers		Inlet and outlet Silencers
Silencers		High Vacuum Safety Relief valves	
Valves	High Vacuum Safety Relief valves		High Vacuum Safety Relief valves



Power pack Petrol or Diesel Engine

Vacuum System Positive Displacement Tr Lobe Blower operating at up to 15Hg

Tri Belt Drive







Tri belt Drive